

AIRFLOW™ 1 CBA 25

50 ML CARTRIDGE DISPENSER



Quick exhaust
prevents run on

Ergonomic design
for comfort and minimum fatigue

Minimum trigger pressure
for effortless use

Model shown: AirFlow CBA 25 50 mL

FEATURES

- Adjustable air regulator
- Minimum trigger pressure
- Air return as standard
- Quick exhaust valve
- Customization possible

BENEFITS

- Ensures precise controlled pressure
- For effortless use and minimum fatigue
- Fast, accurate, effortless application
- Prevents run-on
- Customer labelling

APPLICATIONS



Bonding



Solid
Surface

PRODUCT BY RANGE




THE AIRFLOW 1 CBA 25 2-COMPONENT PNEUMATIC DISPENSER IS DESIGNED FOR LOW VISCOSITY SEALANTS AND ADHESIVES. OFFERS AIR RETURN AS STANDARD FOR FAST, ACCURATE AND EFFORTLESS APPLICATION FOR R-TYPE CARTRIDGES.

SPECIFICATIONS

- Weight: 0.75 kg / 1.63 lbs
- Frame Length: 105 mm / 6.5 in
- Maximum Thrust: 1.5 kN
- Maximum Pneumatic Pressure: 5.0 bar / 75 psi
- Air Consumption: 40 litres/min
- Handle Material: Glass Fiber Reinforced Nylon
- Cartridge Holder Material: Glass Fiber Reinforced Nylon
- Tool Component Approvals: CE, REACH
- Cartridge Capacity: 50 mL (1.69 oz)
- Cartridge Ratio: 1:1
- Viscosity: Low
- Standard Color: Black/Silver
- Customized versions on demand

DIMENSIONS

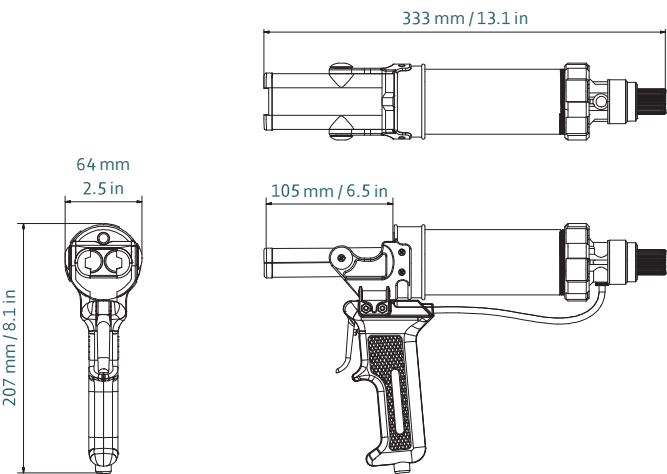


Part number	Article number	Packaging
DP2C 050-01-150-101	177747	10 per Box

MATCHING MIXPAC™ CARTRIDGES



A-System/B-System
50 mL / 1:1 PP/PA

COMPATIBLE CARTRIDGES



Rectangular Flange Cartridge
50 mL / 1:1 PP /PBT

1:1	mm	inch
l	99.7	3.93
a	Ø 21.0	Ø 0.83
c	46.0	1.81

CONVERSION KITS

MATCHING ACCESSORIES