


TS488 X

600 ML CARTRIDGE DISPENSER

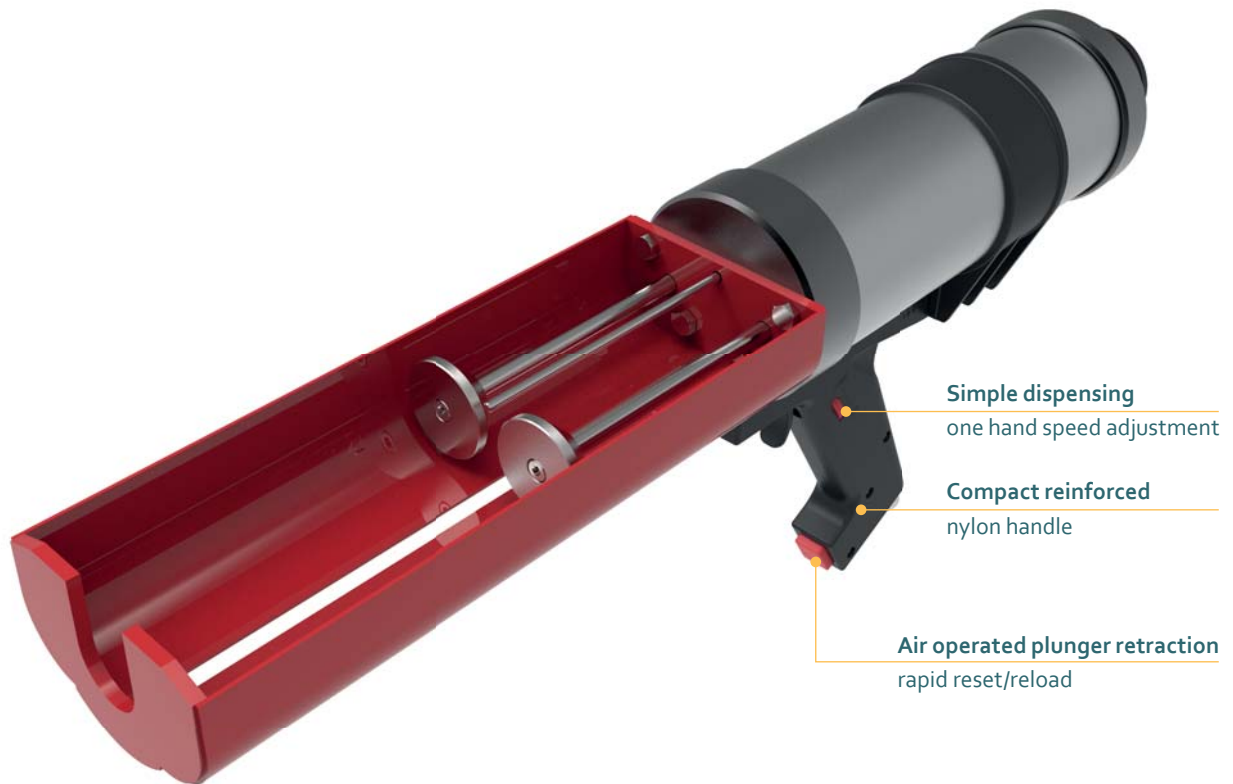

Model shown: TS488 X 600 mL

FEATURES

- Air operated plunger retraction
- One hand pressure adjustment
- Anti-drip function
- Long life technology
- Customization possible

BENEFITS

- Quick cartridge exchange
- Simple dispensing speed adjustment
- Clean application
- Precise working
- Customer labelling

APPLICATIONS



PRODUCT BY RANGE




THE TS488 X 2-COMPONENT PNEUMATIC DISPENSERS ONE-HANDED PRESSURE ADJUSTMENT ALLOWS FOR SIMPLE EFFECTIVE OPERATION. IN ADDITION, THE AIR OPERATED PLUNGER RETRACTION OFFERS RAPID RESET AND RELOAD.

SPECIFICATIONS

- Lightweight: 2.5 kg / 5.5 lbs
- Cartridge Holder Length: 286 mm / 11.2 in
- Maximum Thrust: 4 kN
- Maximum Pneumatic Pressure: 8 bar / 116 psi
- Air Consumption: 40 litres/min
- Handle Material: Reinforced Nylon
- Barrel Material: Aluminum
- Cartridge Holder Material: Steel
- Cartridge Capacity: 600 mL (21.1 oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium
- Standard Color: Black/Red
- Customized versions on demand


DIMENSIONS

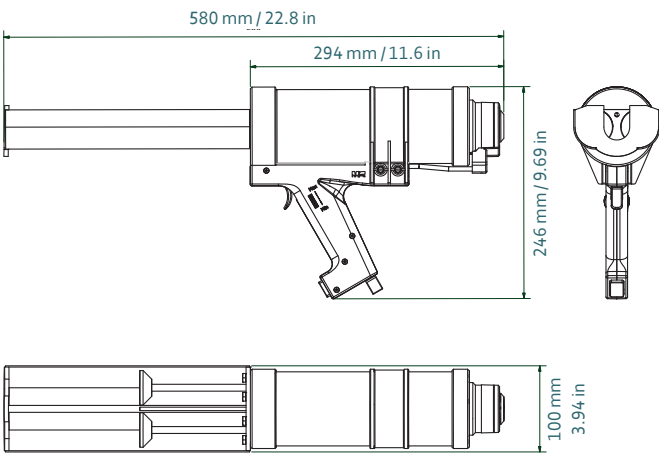

Part number	Article number	Packaging
DP2K 600-01-400-400	152899	1 per Box

MATCHING MIXPAC™ CARTRIDGES

COMPATIBLE SIDE-BY-SIDE CARTRIDGES



Aluminum Cartridge
620 mL (2 × 310 mL) / 1:1 AL

1:1	mm	inch
l	217.0	8.54
a	Ø 48.0	Ø 1.89
c	95.5	3.76

CONVERSION KITS

MATCHING ACCESSORIES