# AIRFLOW™ 1 VBA 200B **400 ML CARTRIDGE DISPENSER**



Model shown: AirFlow 1 VBA 200B 400 mL

## **FEATURES**

- Minimum trigger pressure
- U-opening steel frame
- Snap fit cartridge strap
- Quick exhaust valve
- Customization possible

## **BENEFITS**

- For effortless use and minimum fatique
- Ease of cartridge insertion and removal
- For optimal cartridge support
- Prevents run-on
- Customer labelling

## **APPLICATIONS**



## **PRODUCT BY RANGE**



VBA 200B MR

VBA 200B MR

AirFlow 1 VBA 200A MR

**VBA 200B** 


**VBA 200A** 

# THE AIRFLOW 1 VBA 200B 2-COMPONENT PNEUMATIC DISPENSER IS DESIGNED FOR USE WITH LOW TO MEDIUM VISCOSITY SEALANTS AND ADHESIVES. IT OFFERS FAST, ACCURATE AND EFFORTLESS APPLICATION.

### **SPECIFICATIONS**

- Weight: 2.2 kg / 4.8 lbs
- Frame Length: 216 mm / 8.5 in
- Maximum Thrust: 2.2 kN
- Maximum Pneumatic Pressure:
  6.8 bar / 100 psi
- Air Consumption: 40 litres/min
- Handle Material: Aluminum
- Frame Material: Steel
- Tool Component Approvals: CE, REACH
- Cartridge Capacity: 400 mL (14 oz)
- Cartridge Ratio: 1:1
- Viscosity: Low/Medium
- Standard Color: Black/Blue
- Customized versions on demand

## **DIMENSIONS**

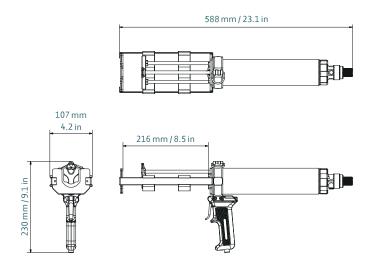

Part number		Packaging
DP2C 400-01-220-111	177772 / A200LP (US)	1 per Box

## MATCHING MIXPAC™ SIDE-BY-SIDE CARTRIDGES



## **COMPATIBLE SIDE-BY-SIDE CARTRIDGES**



1	185.0	7.28
а	Ø 45.0	Ø 1.77
С	93.0	3.66